

4

3

2

1

D

D

C


C

B

B

A

A

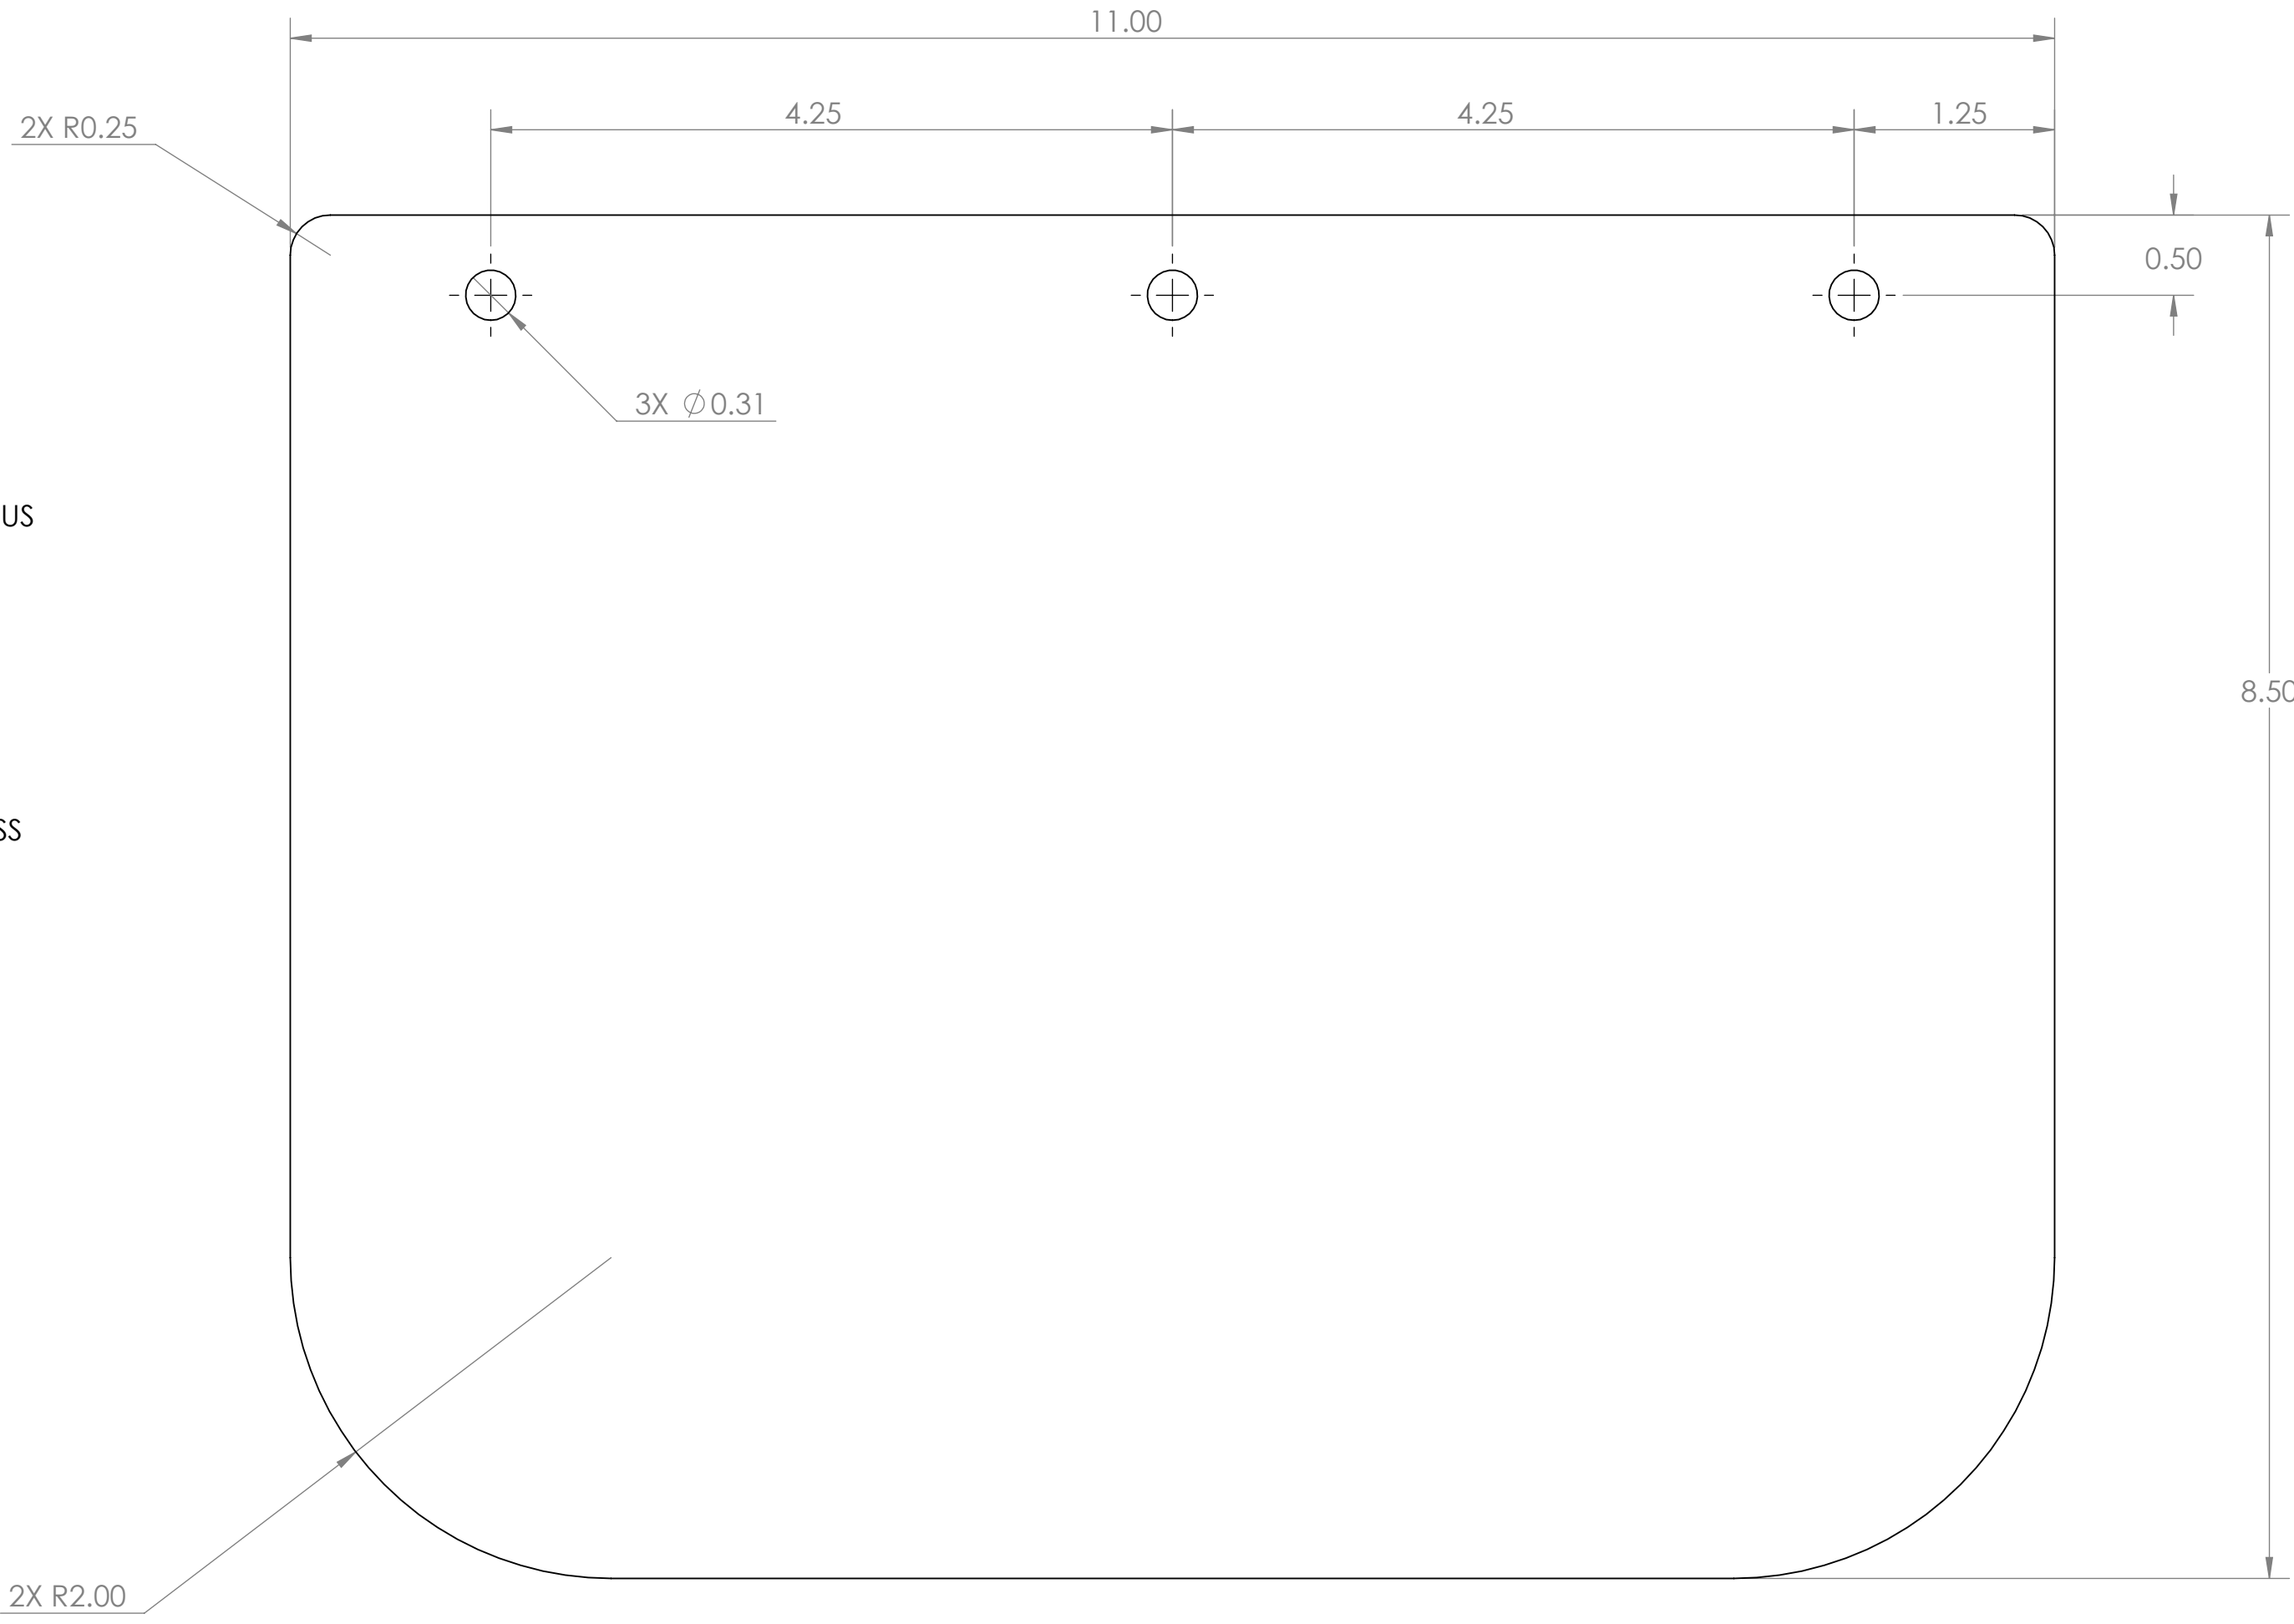

- NOTES:**
- 1) OVERALL SIZE BASED ON STANDARD US LETTER
 - 2) HOLE SIZE AND SPACING BASED ON STANDARD 3 HOLE PUNCH
 - 3) HOLE DIAMETER AND SPACING MAY NEED TO BE ADJUSTED TO MAINTAIN SNAP FIT WITH HEAD BAND FRAME DTM-V3-USLETTER-HF
 - 4) RECOMMENDED MATERIAL THICKNESS 0.002-0.010 INCHES

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	DESIGN THAT MATTERS	
		DIMENSIONS ARE IN INCHES		DRAWN	CME	15APR20	TITLE: US LETTER TRANSPARENT SHIELD
		TOLERANCES:		CHECKED	EJ	15APR20	
		FRACTIONAL ±		ENG APPR.	EJ	15APR20	
		ANGULAR: MACH ± BEND ±		MFG APPR.			
		TWO PLACE DECIMAL ±		Q.A.			SIZE DWG. NO. REV C DTM-V4-USLETTER-TS
		THREE PLACE DECIMAL ±		COMMENTS:			
		INTERPRET GEOMETRIC TOLERANCING PER:					SCALE: 1:1 WEIGHT: SHEET 1 OF 1
		MATERIAL .002-.010" THK CLEAR PLASTIC					
		FINISH					
NEXT ASSY	USED ON	APPLICATION					
		DO NOT SCALE DRAWING					

4

3

2

1