

4

3

2

1

D

D

C


C

B

B

A

A

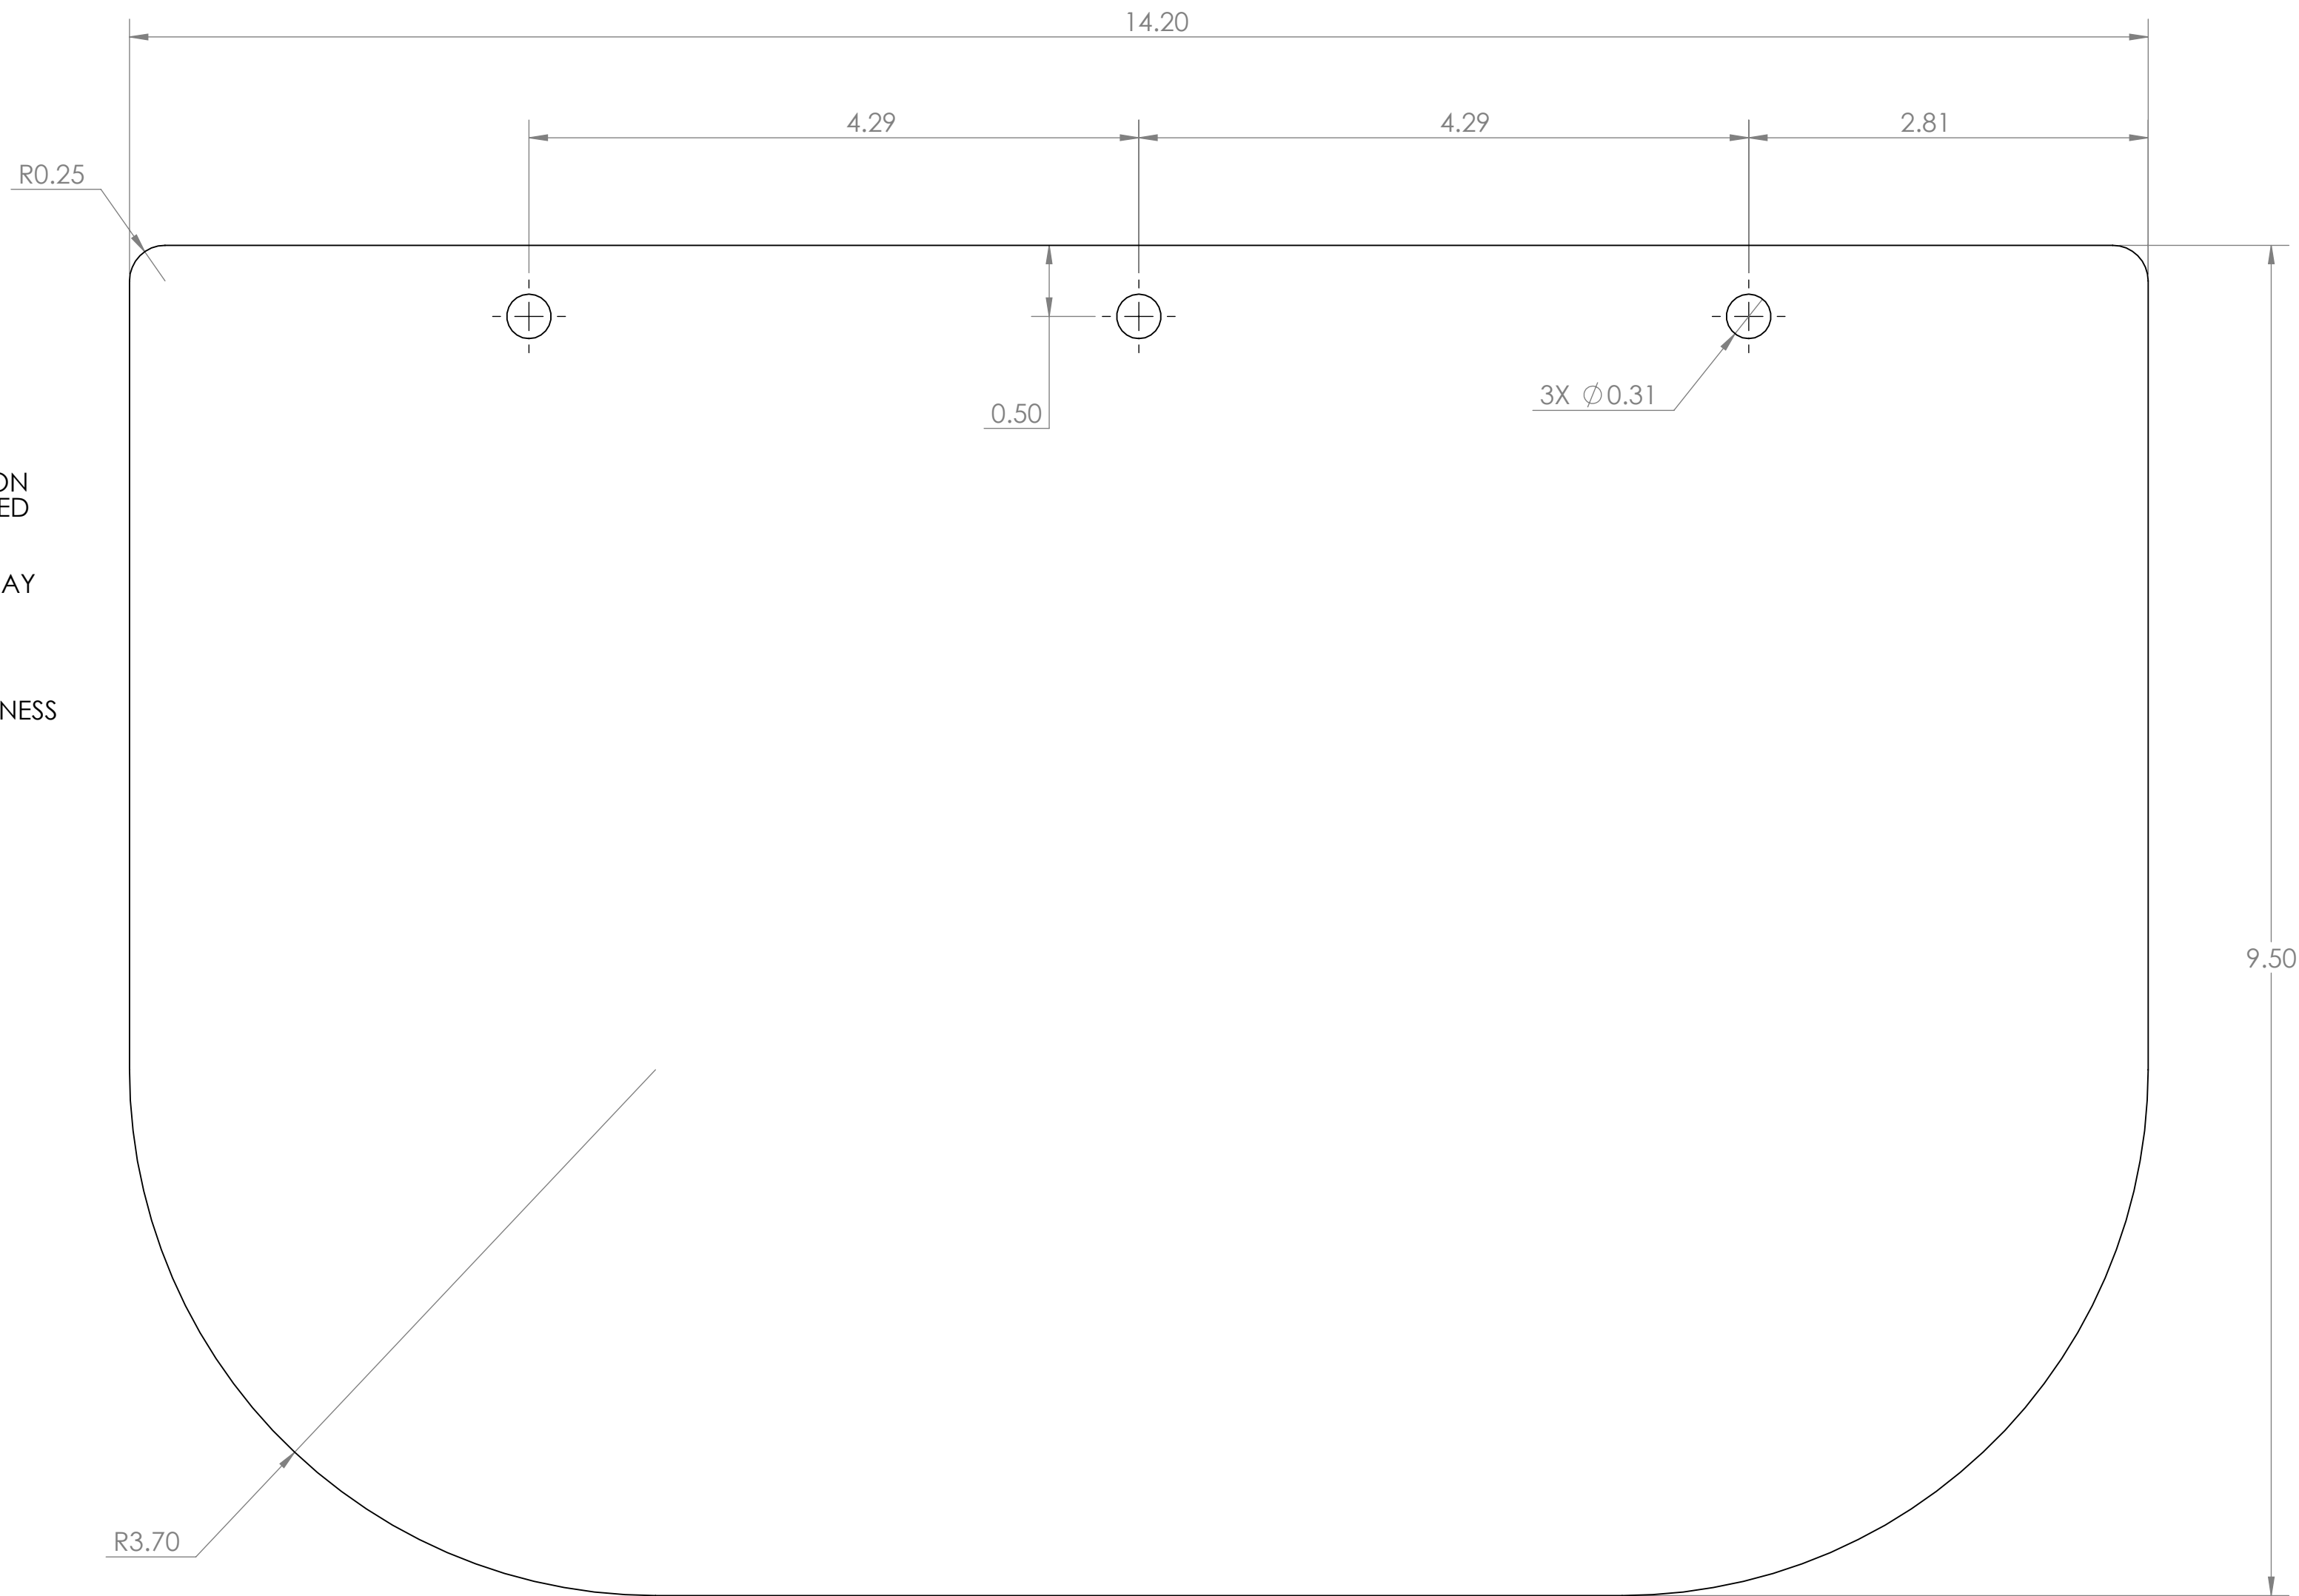

NOTES:

1) HOLE SIZE AND SPACING BASED ON STANDARD 3 HOLE PUNCH, ADJUSTED FOR LASER CUTTING

2) HOLE DIAMETER AND SPACING MAY NEED TO BE ADJUSTED TO MAINTAIN SNAP FIT WITH HEAD BAND FRAME DTM-V3-USLETTER-HF

3) RECOMMENDED MATERIAL THICKNESS 0.002-0.010 INCHES

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	DESIGN THAT MATTERS
		DIMENSIONS ARE IN INCHES		DRAWN	CME	
		TOLERANCES:		CHECKED	EJ	15APR20
		FRACTIONAL ±		ENG APPR.	EJ	15APR20
		ANGULAR: MACH ± BEND ±		MFG APPR.		
		TWO PLACE DECIMAL ±		Q.A.		
		THREE PLACE DECIMAL ±		COMMENTS:		
		INTERPRET GEOMETRIC TOLERANCING PER:				
		MATERIAL				
		.002-.010" THK CLEAR PLASTIC				
		FINISH				
NEXT ASSY	USED ON					SIZE DWG. NO. REV
APPLICATION		DO NOT SCALE DRAWING				C DTM-V4-XL-14X9IN-TS
						SCALE: 1:2 WEIGHT: SHEET 1 OF 1